

**This Page Is Inserted by IFW Operations
and is not a part of the Official Record**

BEST AVAILABLE IMAGES

**Defective images within this document are accurate representations of
the original documents submitted by the applicant.**

Defects in the images may include (but are not limited to):

- **BLACK BORDERS**
- **TEXT CUT OFF AT TOP, BOTTOM OR SIDES**
- **FADED TEXT**
- **ILLEGIBLE TEXT**
- **SKEWED/SLANTED IMAGES**
- **COLORED PHOTOS**
- **BLACK OR VERY BLACK AND WHITE DARK PHOTOS**
- **GRAY SCALE DOCUMENTS**

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

File Copy



Consumer and
Corporate Affairs Canada

Consommation
et Corporations Canada

(11) (A) No. 1 258 473

(45) ISSUED 890815

(52) CLASS 261-50

(51) INT. CL. C04B 40/00⁴

(19) (CA) **CANADIAN PATENT** (12)

(54) Corrosion Inhibition in Reinforced Cement

(72) Martin, Philip J.;
Miksic, Boris A.,
U.S.A.

(73) Granted to Cortec Corporation
U.S.A.

(21) APPLICATION NO. 511,031
(22) FILED 860606
(30) PRIORITY DATE (US) U.S.A. (742,963) 850610

NO. OF CLAIMS 10 - NO DRAWING

Canada

DISTRIBUTED BY THE PATENT OFFICE, OTTAWA
CCA-274 (11-82)

571031

ABSTRACT

One or more hydroxyalkylamines having molecular weights ranging from about 48 to about 500 and vapor pressures at 20°C ranging from about 10^{-4} to about 10^1 mm. of mercury are employed as the major ingredient of a corrosion inhibiting composition that itself is mixed into a hydraulic cement slurry. The hydroxyalkylamines provide corrosion protection to iron or steel reinforcing members embedded within the concrete but do not substantially affect the air entraining capacity of the slurry.

Description of the Prior Art.

Several patent references disclose the use of certain alkali metal nitrites as cement additives to reduce corrosion of embedded iron or steel members. U.S. Patent 3,210,207 describes the use of sodium nitrite and various other compounds in combination with major amounts of calcium formate. U.S. Patent 3,801,338 discloses the incorporation in concrete of corrosion-inhibiting compositions containing major amounts of sodium nitrite and smaller amounts of calcium formate; small amounts of triethanolamine can optionally be added to the composition. In U.S. Patent 3,976,494, sodium nitrite is employed in combination with phosphoric esters and boric esters, and U.S. Patent 4,365,999 employs a composition containing a nitrite such as sodium nitrite, a compound such as glycine, and a hydrazine hydrate. Calcium nitrite is employed according to the teaching of U.S. Patent 4,092,109, and a polyvinyl alcohol resin composition is employed in the teaching of U.S. Patent 4,119,597.


SUMMARY OF THE INVENTION

It has now been found that one or more corrosion-inhibiting hydroxyalkylamine compounds having molecular weights ranging from about 48 to about 500 and having vapor pressures at 20 °C ranging from about 10^{-4} to 10^1 mm. Hg. can be employed as the major ingredient of a corrosion inhibiting composition that itself can be mixed into a hydraulic cement slurry, and that the resulting slurry surprisingly maintains its ability to entrain air; that is, the hydroxyalkylamine corrosion-inhibiting compounds do not have a substantial effect upon the air-entraining properties of a cementitious slurry. The ratio (referred to elsewhere herein as the "air entrainment

variance") of the volume of entrained air " V_1 " per unit volume of slurry, as above described, to the volume of entrained air " V_0 " per unit volume of an identical slurry but absent the corrosion-inhibiting compound, desirably is in the range of $3/2$ to $2/3$. Preferably, V_1 is within 20% of V_0 . These hydroxyalkylamines also appear to have the capacity to percolate or permeate through cured concrete structures so as to come into contact with iron or steel reinforcing members and provide these members with corrosion protection. Moreover, the hydroxyalkylamines of the invention have no substantial effect upon set times of concrete slurries. That is, the slurry set times are neither increased nor decreased through the addition of the hydroxyalkylamine corrosion inhibitor by more than about 25%.


In one embodiment, the invention relates to a method of inhibiting corrosion of iron or steel imbedded in concrete, and comprises adding to the concrete an effective quantity of corrosion inhibiting composition having as its major ingredient a water-soluble and preferably water-miscible hydroxyalkylamine (including mixtures thereof) having a molecular weight in the range of about 48 to about 500 and a vapor pressure at 20°C in the range of 10^{-4} to 10^1 mm. Hg. Although various other corrosion resistant materials can be employed in admixture with the hydroxyalkylamine, the hydroxyalkylamine component is the major ingredient; that is, it provides the majority by weight of the corrosion-inhibiting composition. The hydroxyalkylamines are water soluble and preferably are miscible with water in all proportions. Preferably, the air entrainment variance V_1/V_0 , as above defined, ranges from about $3/2$ to about $2/3$, and most preferably V_1 does not vary from V_0 by more than 20%.

The hydroxyalkylamines referred to above preferably are compounds of the formula:

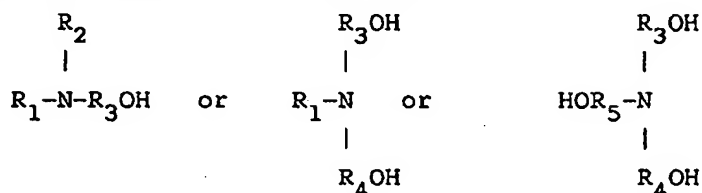

in which R_1 and R_2 are, independently, hydrogen, lower (C_1-C_6) alkyl, C_4-C_6 cycloalkyl, lower (C_2-C_6) alkenyl, aryl, or alkaryl, wherein R_3 , R_4 , and R_5 are, independently, lower (C_1-C_6) alkylene, C_4-C_6 cycloalkylene, lower (C_2-C_6) alkenylene, phenylene, alkphenylene, or $-R_6-X-R_7-$ wherein R_6 and R_7 are, independently, lower (C_1-C_6) alkylene, C_4-C_6 cycloalkylene, lower (C_2-C_6) alkenylene and X is $-O-$ or $-S-$ or $-NH-R_8$ wherein R_8 is lower (C_1-C_6) alkylene, C_4-C_6 cycloalkylene, or lower (C_2-C_6) alkenylene.

More desirably, the hydroxyalkylamines are compounds of the formula:



wherein R_9 , R_{10} , and R_{11} , may independently be, hydrogen, lower (C_1-C_6) alkyl or $-R_{12}-OH$ in which R_{12} is lower alkylene, C_4-C_6 cycloalkylene, phenylene, or alkphenylene, and at least one of R_9 , R_{10} , and R_{11} is $-R_{12}-OH$. Preferably, R_9 , R_{10} , and R_{11} are, independently, hydrogen, C_1-C_3 alkyl or C_1-C_4 hydroxyalkyl with at least one of R_9 , R_{10} , and R_{12} being C_1-C_4 hydroxyalkyl. Typifying such compounds are diethanol-

amine, dimethylpropanolamine, methyldiethanolamine, monoethanolamine and dimethylethanolamine.


In another embodiment, the invention relates to a pourable cementitious slurry suitable for making concrete structures in which iron or steel reinforcing members may be embedded. The slurry comprises a hydraulic cement, water, aggregates such as sand and, optionally, gravel, and a corrosion-inhibiting composition having as its major ingredient one or a mixture of hydroxyalkylamines as above-identified in a concentration by weight of from about 0.002% to about 3%, and preferably about 0.01% to about 0.1%, the slurry being further characterized by including entrained air in an amount such that V_1/V_0 , as above defined, ranges from about 3/2 to about 2/3, V_1 preferably varying from V_0 by no more than about 20%.

In another embodiment, the invention relates to a method for repairing existing concrete structures having embedded iron or steel reinforcing members in which a cementitious slurry is poured on top of the cured concrete structure. This occurs, for example, when a bridge deck is repaired and the uppermost concrete layer is mechanically removed to provide a bed upon which a new concrete layer is poured. The method is characterized by the step of incorporating in a cementitious slurry from about 0.002% to about 3% by weight (and preferably from about 0.01% to about 0.1% by weight) of the corrosion-inhibiting composition referred to above, and permitting the hydroxyalkylamine constituent to migrate from the slurry, when poured, through the cured concrete structure and into corrosion-inhibiting contact with the iron or steel reinforcing members. Again, V_1/V_0 preferably is

in the range of about $3/2$ to about $2/3$, and V_1 most preferably varies from V_0 by no more than about 20%


DETAILED DESCRIPTION

The hydroxyalkylamine corrosion-inhibiting compounds useful in the invention are those which are water soluble (that is, soluble in water to the extent of at least about 0.5 grams of the hydroxyalkylamine per liter of water at 20°C). The hydroxyalkylamine compounds of the invention are preferably water miscible in all proportions. The compounds can be primary, secondary or tertiary amines having molecular weights in the range of about 48 to about 500 and preferably from about 48 to about 250. The compounds desirably are of the formula:

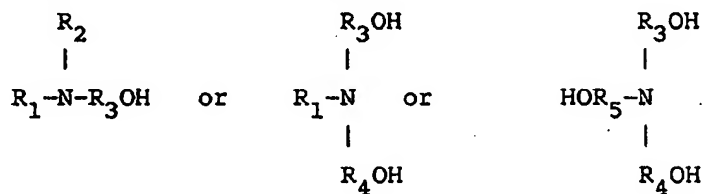

wherein R_1 through R_5 are as described above.

Preferably, the compounds are of the formula:



wherein groups R_9 , R_{10} and R_{11} are as described above. The hydroxyalkylamines of the invention, in addition, exhibit vapor pressures in the range of from about 10^{-4} to about 10^1 mm. mercury at 20°C .

The corrosion-inhibiting compositions of the invention include one or more hydroxyalkylamines as the major constituent and preferably as the sole constituent. The compositions may include other, minor

corrosion-inhibiting ingredients. If desired, a mixture of hydroxyalkylamines may be employed, it being required only that the hydroxyalkylamine constituent or constituents together comprise the major (greater than 50% by weight) ingredient of the corrosion-inhibiting composition.

As mentioned earlier, dimethylethanolamine is a preferred hydroxyalkylamine. Other typical hydroxyalkylamine compounds include methyldiethanolamine, triethanolamine, diethylmethanolamine, N,N-dimethyl-N', N'-di-(2-hydroxypropyl)-1,3-propane diamine, dimethylaminoethoxyethanol, N,N,N'-trimethyl-N'-(hydroxyethyl)-1,3-propane diamine, diethanolamine and dimethylpropanolamine.

The compounds also are particularly characterized by not substantially affecting the air-entraining capacity of cementitious slurries. Freshly poured concrete, often referred to as "normal weight," commonly contains about 6% by volume of air, although this value can range between extremes of from about 3% to about 8%. Normal weight concrete is often used as structural concrete for retaining walls and the like. So called "heavyweight" or "low slump" concrete slurries usually contain entrained air ranging from about 3.5% to about 7.5% by volume and commonly about 5.5% by volume. Heavy weight concrete commonly is used in situations requiring high wear resistance such as for bridge overlays. Control of the volume of entrained air in both normal weight and heavy weight concrete is important.

The hydroxyalkylamine corrosion inhibitors of the invention, when incorporated in a cementitious slurry, do not increase the volume of entrained air by more than about 1/2 nor decrease such volume by more

than about $1/3$. Put another way, if V_1 is the volume of air entrained in a unit volume of slurry incorporating a corrosion inhibitor of the invention, and V_0 is the volume of air entrained in an identical slurry but absent the corrosion inhibitor, then the ratio V_1/V_0 falls within the range of about $3/2$ to $2/3$. Most preferably, V_1 does not vary from V_0 by more than about 20%.

The air content may be measured by several methods, but the method of ASTM C-231-82 is preferred. Various air entrainment agents are known to the art, and can be employed in concrete mixtures to facilitate air entrainment.

EXAMPLE I

To determine the effect which different corrosion inhibiting compounds have upon the ability of a hydraulic cement slurry to retain entrained air, a variety of normal weight cement slurries were prepared in accordance with ASTM C-192. Each batch included 684 pounds (310 kg.) of Portland cement, 1,166 pounds (529 kg.) of oven-dried fine aggregate (sand), 1,768 pounds (802 kg.) of oven-dried coarse aggregate ($3/4$ inches (1.9 cm.) and water in accordance with the ASTM procedure. The results are reported in Table I, and indicate that the hydroxyalkylamine inhibitor (dimethylethanolamine) had little effect on the entrained air content of the cementitious material regardless of the air entrainment agent employed. However, the corrosion inhibitors ("F") and ("G"), which were not mainly hydroxyalkylamine, greatly reduced the ability of the cement to entrain and retain entrained air, regardless of the type and amount of air entrainment agent.

1258473

- 9 -

TABLE I

<u>Batch:</u>	<u>1</u> <u>(Control)</u>	<u>2</u>	<u>3</u>	<u>4</u>	<u>5</u>
Air Entrain- ment Agent; oz.	A ⁽¹⁾ 41	A ⁽¹⁾ 41	B ⁽²⁾ 41	C ⁽³⁾ 41	A ⁽¹⁾ 41
Kg.	1.16	1.16	1.16	1.16	1.16
Water, lbs.	248	253	262	239	277
Kg.	112.5	114.8	118.8	108.4	125.6
Slump, in.	3	3-1/4	3-1/2	3-1/2	2-1/2
cm	7.62	8.26	8.89	8.89	6.35
(ASTM C-143-78)					
Air Content %, (ASTM C-231-82)	8.4	7.9	6.9	9.4	3.3
Unit Weight, lbs/ft. ³	139.96	140.76	143.84	139.07	148.31
g/cm ³	2.242	2.255	2.304	2.228	2.376
Corrosion Inhibitor	None	D ⁽⁴⁾ 1.0 lb.	D ⁽⁴⁾ 1.0 lb.	E ⁽⁴⁾ 1.0 lb.	F ⁽⁵⁾ 1.0 lb.
Kg.		0.4536	0.4536	0.4536	0.4536
Air Entrain- ment Agent; oz.	B ⁽²⁾ 41	C ⁽³⁾ 41	A ⁽¹⁾ 82	A ⁽¹⁾ 41	A ⁽¹⁾ 123.1
Kg.	1.16	1.16	2.32	1.16	3.49

1258473

- 10 -

<u>Batch:</u>	<u>6</u>	<u>7</u>	<u>8</u>	<u>9</u>	<u>10</u>
Water, lbs.	275	275	257	280	280
Kg.	124.7	124.7	116.6	127.0	127.0
Slump, in.	3"	3"	5"	3"	2-1/2
cm.	7.62	7.62	12.7	7.62	6.35
Air Content, %	2.5	2.5	4.1	2.5	2.8
Unit Weight, lbs/ft. ³	149.06	148.91	147.12	-----	-----
g/cm ³	2.39	2.39	2.36	-----	-----
Corrosion	F ⁽⁵⁾	F ⁽⁵⁾	F ⁽⁵⁾	G ⁽⁶⁾	G ⁽⁶⁾
Inhibitor lb.	1.0	1.0	1.0	2.0	2.0
Kg.	0.4356	0.4356	0.4356	0.8712	0.8712

Notes:

- (1) "Daravair M", a trademarked product of W. R. Grace & Co. (air entrainment agent)
- (2) "Pro-Air", a trademarked product of Protex Industries, Inc. (air entrainment agent)
- (3) "Amex 210", a trademarked Product of American Admixtures & Chemicals Corp. (air entrainment agent)
- (4) Dimethylethanolamine
- (5) Mixture of N,N-dimethyl, N-(C₁₀-C₁₁) alkyl amines
- (6) VCI-307, corrosion inhibitor, product of Sealed Air Corporation.

1258473

- 11 -

EXAMPLE II

Slurries of Portland cement, sand and water were prepared in accordance with ASTM C-185-80. Various candidate corrosion inhibitors were added to specimens of the slurry at a concentration of 250 parts of corrosion inhibitor per million parts of slurry water. Duplicate measurements of air content were made in accordance with the ASTM procedure. Further, measurements of the ability of the candidate corrosion inhibitors to inhibit corrosion were made under ASTM G-5/82, with slight modifications. The results are reported in Table II. The value V_1/V_0 was derived by dividing the reported percentage air content by the percentage air content of the control.

TABLE II

Candidate Corrosion Inhibitor	Air Content, %, Avg.	Annual Corrosion Rate;		V ₁ /V ₀
		Mils	Microns	
A. Control	7.93	37.7	957.6	-
B. 85% Dimethylamino - ethoxyethanol, 15% bis (dimethylaminoethyl) ether	9.23	1.8	45.7	1.16
C. N,N,N'-trimethyl-N'-(hydroxyethyl) ethylene diamine	9.35	1.8	45.7	1.18
D. N,N,N'-trimethyl-N'-(hydroxyethyl)-1,3- propane diamine	9.96	1.2	30.5	1.26
E. N,N-dimethyl-N',N'- di (2-hydroxypropyl)- 1,3-propane diamine	9.91	0.7	17.8	1.25
F. Methyl-diethanolamine	8.55	0.5	12.7	1.08
G. Triethanolamine	8.04	0.5	12.7	1.01
H. Monoethanolamine	7.71	0.5	12.7	0.97
I. Dimethylethanolamine	9.4	1.5	38.1	1.19
J. Dicyclohexylamine	4.3	1.4	35.6	0.54

Example III

Batches of "normal slump" or "normal weight" concrete were prepared by mixing together the following ingredients on a laboratory mixer:

<u>Ingredient</u>	<u>Lbs/yd³</u>	<u>Kg/m³</u>
Cement, Type I Portland	658	390.4
Fine aggregate	1160	688.2
Coarse aggregate	1770	1050.1
Water, net	280	166.1
Protex [*] AES	0.69	0.41

The moisture content of the aggregates was determined and the batch weights were adjusted for the free moisture in the aggregates. The Protex AES ingredient is an air-entrainment product manufactured by Protex Industries Incorporated and comprising an aliphatic hydrocarbon resin derived from pine wood.

To 1.5 cubic foot (0.042 cubic meter) aliquots of the resulting slurry were added candidate corrosion inhibitor compounds at a concentration of 1 pound per cubic yard (0.593 Kg/m³). "Slump" was measured in accordance with ASTM:C143, and the air content of the concrete was measured by the pressure method according to ASTM:C231. In addition, two 6 inch x 12 inch (15.2 cm x 30.48 cm) standard cylinders were cast for each batch and were cured at 73 degrees F (22.8 degrees C) and 100% relative humidity prior to testing it seven days after casting and 28 days after casting. The candidate corrosion inhibitor compounds are identified by letter as follows, and the test results are reported in Table III.

* Trade Mark

1258473

- 14 -

<u>Inhibitor Sample</u>	<u>Identification</u>
A	N, N, N'-trimethyl-N'-hydroxyethyl ethylene diamine
B	N, N-dimethyl-N',N'-dihydroxypropyl-1,3-propane diamine
C	Methyldiethanolamine
D	N,N,N'-trimethyl-N'-hydroxyethyl-1,3-propane diamine
E	Dimethylaminoethoxyethanol (85%), Bis-dimethylaminoethyl ether (15%)
F	Cyclohexylamine
G	Dicyclohexylamine
H	Monoethanolamine
I	Triethanolamine
J	Dimethylethanolamine

Table III

Inhibitor Sample	Slump, in. cm.	Air Content %	Compressive Strength Kg/cm ²		Time of Set, Hours (ASTM C-403)		V ₁ /V ₀
			7 days	28 days	Initial	Final	
Control	3	7.6	361.4	428.9	5.15	7.9	-
A	3-1/4	8.3	303.0	365.6	5.35	7.42	1.34
B	2-3/4	7.0	329.0	416.2	5.3	7.25	1.14
C	3-1/2	8.9	374.0	535.0	4.45	5.95	1.25
D	3-1/4	8.3	385.3	486.5	4.85	6.4	1.42
E	3	7.6	383.9	485.8	5.1	6.53	1.29
F	3	7.6	407.1	496.4	5.55	6.85	1.37
G	3-1/4	8.3	423.2	492.9	4.35	6.13	1.25
H	3-1/2	8.9	364.9	457.7	4.9	6.5	1.53
I	3-1/2	8.9	338.2	432.4	4.8	6.25	1.46
J	2-1/2	6.4	347.3	453.5	4.95	6.7	0.93

Example IV

The procedure of Example III was duplicated with somewhat different concentrations of ingredients to provide a "low slump" concrete. The concrete slurry included a water reducing admixture for concrete, "Prokrete N3", a blend of calcium lignosulfonate and a polysaccharide and sold by Protex Industries, Incorporated. The slurry had the following composition:

<u>Ingredient</u>	<u>Lbs/yd³</u>	<u>Kg/m³</u>
Cement, Type I Portland	810	480.5
Fine aggregate	1420	842.4
Coarse aggregate	1436	851.9
Water, net	265	157.2
Protex AES	0.71	0.42
Prokrete [*] N3	1.52	0.90

The candidate inhibitors identified in connection with Example III were employed in 1.5 cubic foot (.042 cubic yard) aliquots, and testing was conducted in accordance with the procedures of Example III, yielding the results set out in Table IV.

* Trade Name

Table IV

Inhibitor Sample	Slump, in. cm.	Air Content, %	Compressive Strength Kg/cm ²		Time of Set, Hours (ASTM C-403) <u>Initial</u> <u>Final</u>	V ₁ /V ₀
			7 days	28 days		
Control	3/4	1.9	387.4	466.8	4.9 6.0	-
A	3/4	1.9	384.6	463.3	5.1 6.6	0.78
B	1/2	1.3	379.0	500.6	4.77 6.82	0.77
C	1	2.5	366.3	509.7	4.8 6.4	0.73
D	1	2.5	357.9	472.5	5.05 6.6	0.83
E	1/4	0.6	387.4	508.3	4.5 6.3	0.67
F	1	2.5	400.7	472.5	5.05 6.6	0.73
G	1	2.5	393.7	498.5	5.3 6.65	0.67
H	1	2.5	361.4	471.8	5.3 6.8	0.80
I	1	2.5	345.9	421.1	5.4 6.92	0.92
J	1	2.5	423.2	463.3	5.05 6.75	0.83

The ratio of V_1/V_0 , as above defined, is equal to the ratio of the air content percentages appearing in Tables III and IV divided by the air content percentage of the control samples. Thus, the ratio V_1/V_0 for the test examples described in Tables III and Table IV range from about 1.5/1 to about .67/1, or, simplifying, from about 3/2 to about 2/3. The preferred hydroxyalkylamine, dimethylethanolamine, does not cause the air content of the concrete slurry to vary more than 20%. It will also be noted that the set times, both initial and final, do not vary from the "control" set time by more than about 25%.

The hydroxyalkylamine compounds referred to herein, being water-soluble, demonstrate mobility within concrete structures when water is applied. As a result, the hydroxyalkylamines can be applied to existing reinforced concrete structures, the amines being carried by water into corrosion-inhibiting proximity to the reinforcing members. The compounds thus can be included in hydraulic cement slurries that are coated over previous concrete structures, the corrosion inhibitors percolating downwardly through the existing concrete to afford corrosion protection to embedded reinforcing members. Rain, melting ice and snow and the like provide the water vehicle for carrying the hydroxyalkylamine compounds throughout concrete structures. Some vapor phase migration of the hydroxyalkylamine compounds is believed to occur as well. The concrete structures thus serve as resevoirs of the corrosion inhibitor to assure a reasonably adequate long-term and continuous supply of inhibitor at the surface of the reinforcing members.


Because ~~skin~~ contact with the corrosion inhibitors used herein should be avoided, the corrosion inhibitors, being soluble in water, preferably are incorporated in a concrete slurry at the time the slurry is made up. Desirably, the hydroxyalkylamine additives are added by means of a metering pump to the "gauge" water that is mixed with the hydraulic cement, sand and other ingredients to form the concrete slurry. This procedure provides a safe and effective control over the amount of corrosion inhibitor that is actually added, and assures that the inhibitor is distributed homogenously through the slurry batch.

While a preferred embodiment of the present invention has been described, it should be understood that various changes, adaptations and modifications may be made therein without departing from the spirit of the invention and the scope of the appended claims.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. Method of inhibiting corrosion of iron or steel in concrete which comprises incorporating in a slurry of the concrete an effective quantity of a corrosion inhibiting composition having as its major ingredient a water-soluble hydroxyalkylamine having a molecular weight in the range of about 48 to about 500 and a vapor pressure at 20° C in the range of 10^{-4} to 10^1 mm. Hg.

2. The method of Claim 1 wherein the hydroxyalkylamine is a compound of the formula:




wherein R_9 , R_{10} , and R_{11} , are, independently, hydrogen, lower alkyl or $-R_{12}-OH$ in which R_{12} is lower alkylene, C_4-C_6 cycloalkylene, phenylene, or alkphenylene, and at least one of R_9 , R_{10} , and R_{11} is $-R_{12}-OH$.

3. Method of inhibiting corrosion of iron or steel to be imbedded in concrete which comprises incorporating in a concrete slurry from about 0.002% to about 3% by weight of a corrosion inhibiting composition of which the major ingredient is a hydroxyalkylamine having a molecular weight in the range of about 48 to about 500 and a vapor pressure at 20°C in the range of about 10^{-4} to 10^1 mm. Hg., the corrosion inhibiting composition permitting an air entrainment variance V_1/V_0 limited to the range of 3/2 to 2/3 wherein V_1 is the volume of entrained air per unit volume of such slurry and V_0 is the volume of entrained air per unit


volume of an identical slurry but from which the corrosion inhibiting composition has been omitted.

4. The method of Claim 3 wherein the hydroxyalkylamine is a compound of the formula

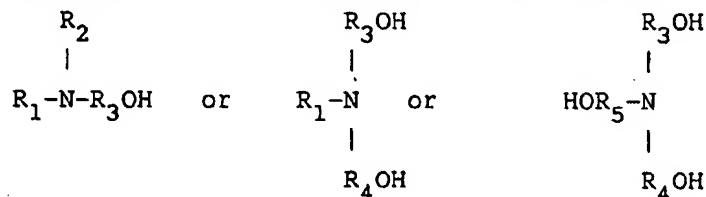

in which R_1 and R_2 are, independently, hydrogen, lower alkyl, $\text{C}_4\text{-C}_6$ cycloalkyl, lower alkenyl, aryl or alkaryl, wherein R_3 , R_4 , and R_5 are, independently, lower alkylene, $\text{C}_4\text{-C}_6$ cycloalkylene, lower alkenylene, phenylene, alkphenylene, or $-\text{R}_6\text{-X-R}_7-$ wherein R_6 and R_7 are, independently, lower alkylene, $\text{C}_4\text{-C}_6$ cycloalkylene, lower alkenylene and X is $-\text{O}-$ or $-\text{S}-$ or $-\text{NH-R}_8$ wherein R_8 is lower alkylene, $\text{C}_4\text{-C}_6$ cycloalkylene, or lower alkenylene.

5. The method of Claim 3 in which the hydroxyalkylamine is a compound of the formula:




wherein R_9 , R_{10} and R_{11} may independently be H, alkyl or $-\text{R}_{12}\text{-OH}$ in which R_{12} is lower alkylene, $\text{C}_4\text{-C}_6$ cycloalkylene, phenylene or alkphenylene, and at least one of R_9 , R_{10} and R_{11} is $-\text{R}_{12}\text{-OH}$.

6. The method of Claim 5 wherein R_9 , R_{10} , and R_{11} are, independently, hydrogen, $\text{C}_1\text{-C}_3$ alkyl or $\text{C}_1\text{-C}_4$ hydroxyalkyl with at least one of R_9 , R_{10} , and R_{12} being $\text{C}_1\text{-C}_4$ hydroxyalkyl.


7. A pourable cementitious slurry suitable for making concrete structures in which articles of iron or steel may be imbedded, the slurry comprising a hydraulic cement, water, sand and a corrosion inhibiting composition that does not substantially affect the ability of the slurry to entrain or to maintain entrained air and of which the major ingredient is a hydroxyalkylamine having a molecular weight in the range of about 48 to about 500 and a vapor pressure at 20°C in the range of 10^{-4} to 10^1 mm. Hg., the hydroxyalkylamine constituent being present in a concentration of from about 0.002% to about 3% by weight of the slurry.

8. The slurry of claim 7 wherein said hydroxyalkylamine is a compound of the formula

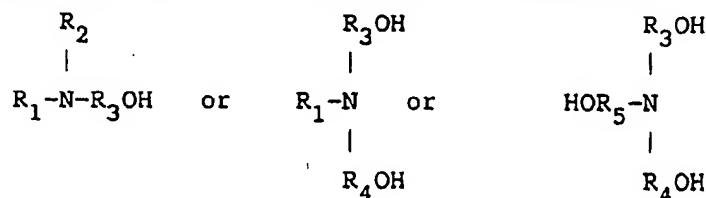

in which R_1 and R_2 are, independently, hydrogen, lower alkyl, C_4-C_6 cycloalkyl, lower alkenyl, aryl or alkaryl, wherein R_3 , R_4 , and R_5 are, independently, lower alkylene, C_4-C_6 cycloalkylene, lower alkenylene, phenylene, alkphenylene, or $-R_6-X-R_7-$ wherein R_6 and R_7 are, independently, lower alkylene, C_4-C_6 cycloalkylene, lower alkenylene and X is -O- or -S- or -NH- R_8 wherein R_8 is lower alkylene, C_4-C_6 cycloalkylene, or lower alkenylene.

9. The slurry of claim 7 wherein the hydroxyalkylamine is a compound of the formula



1258473

- 23 -

wherein R_9 , R_{10} , and R_{11} , are, independently, hydrogen, lower alkyl or $-R_{12} - OH$ in which R_{12} is lower alkylene, C_4-C_6 cycloalkylene, phenylene, or alkphenylene, and at least one of R_9 , R_{10} , and R_{11} is $-R_{12} - OH$.

10. A cured concrete structure having iron or steel reinforcing members embedded therein, and including, in corrosion-inhibiting proximity to said members, a corrosion inhibiting composition resulting from practice of the method of claim 3.

